

ISO2



Wavelengths from 1050nm to 1650nm are now offered in the Exolight v2.0 model. Short-wave infrared technology provides the necessary contrast to illuminate test objects that visible and ultraviolet light cannot provide.

The Exolight v2.0 includes molded Lumiform diffuser that provides a dramatic increase in uniformity, coverage area, and is resistant to impact. With a 120° spread of uniform lighting, the EXO2 is perfect for even the most sensitive area scan application and its high level of diffusion makes it a great candidate for transmission or backlight applications; even for line scan. Hard molding makes the diffuser extremely durable to impact and can be configured for an IP rating with greater water and dust resistance.

Available Wavelengths



Broadband IR

is available for the SWIR Exo2 model. The SWIR Exo2 can be configured with any combination of these six available wavelengths.



FEATURES

- Lumiform diffuser with 120° (±10%) uniform lighting
- Hard molded diffuser for durability and resistance to impacts
- Features a clamping style tilt bracket to allow for easy positioning from 0 – 180°
- Available in a limited amount of standard sizes but can be custom designed per order
- Built-in Constant Current Driver with 0 – 10V intensity control.
- Compatible with DDC-3 and ILD-35-24-L Dimmers

WAVELENGTH (nanometers)

W	White 6000K, Nominal
SWIR	1050nm
SWIR	1200nm
SWIR	1300nm
SWIR	1450nm
SWIR	1550nm
SWIR	1650nm

SPECIFICATIONS

Power Source:	24VDC ±5%
Cable (Standard):	10 ft. (3 m) with flying leads
Housing:	Black Anodized Aluminum
IP Rating:	IP65 sealed, IP50 unsealed
Ambient Temperature:	-20°C to 40°C


ISO2

SWIR EXO2 LIGHTS						
MODEL*	Lens Length Inches (cm)	Weight lbs/Kg	Cable QTY	Cable Length	Cable Description	Max. Current @24VDC
ISO2-10	11.51 (29.2)	2.07 / .939	2	10ft	18 AWG, 4 Conductor and 24 AWG, 8 Conductor	0.5A max
ISO2-20	21.62 (54.9)	3.67 / 1.66				1.2A max.
ISO2-30	31.73 (80.6)	5.39 / 2.44				1.8A max.
ISO2-40	41.73 (106.0)	7.09 / 3.22				2.5A max.
ISO2-50	51.73 (131.4)	8.54 / 3.87				3.2A max.

Cable#1 Wiring (4 conductor)	
Wire Color	Function
RED	+24VDC
WHITE	+24VDC
BLACK	GROUND (24V RTN)
GREEN	GROUND (24V RTN)

Cable#2 Wiring (8 conductor)	
Wire Color	Function
BROWN	IR1050, 0-10V Intensity Control
ORANGE	IR1200, 0-10V Intensity Control
BLUE	IR1300, 0-10V Intensity Control
GREEN	IR1450, 0-10V Intensity Control
BROWN-white	IR1550, 0-10V Intensity Control
ORANGE-white	IR1650, 0-10V Intensity Control
BLUE-white	No Connection
GREEN-white	No Connection

Note: The 0-10VDC Intensity Control input can accept voltages from 0-24VDC where the light will operate at full intensity in the 10-24VDC range. The light is proportionally dimmer for any Intensity Control voltage less than 10VDC and the light is OFF at approximately 0V or not connected (floating).

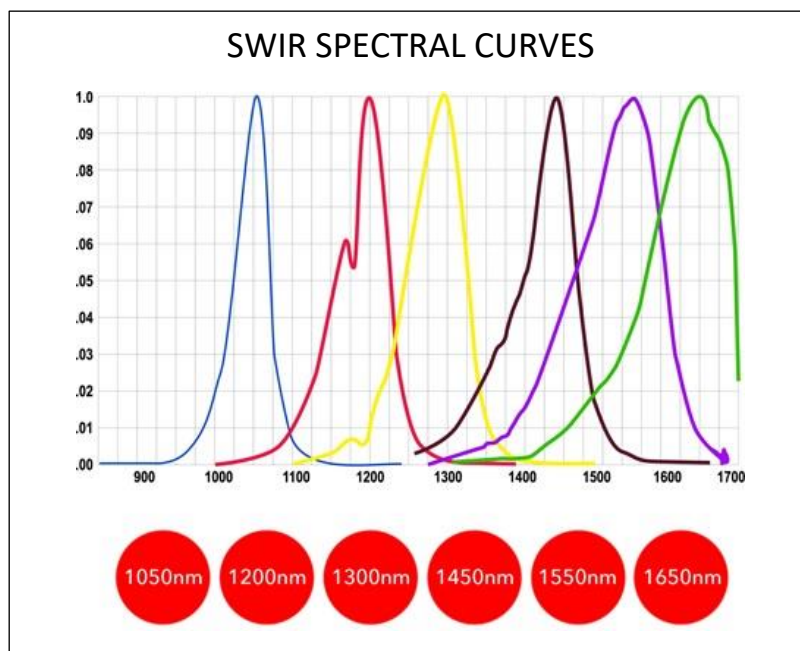

ISO2

PART NUMBER KEY														
MODEL	-	LENGTH ID (inches)	-	WAVELENGTH	-	DRIVER* (most common)	-	POLARIZER	-	COVER	-	CABLE LENGTH	-	CONN.** (most Common)
ISO2	-	XX	-	XXXXX	-	XXX-XXXXXX	-	XXXX	-	XX	-	XXX	-	XXXX
ISO2		10 (10") 20 (20") 30 (30") 40 (40") 50 (50")		W (White 6000K, Nominal) IR05 (Infrared 1050nm) IR20 (Infrared 1200nm) IR30 (Infrared 1300nm) IR45 (Infrared 1450nm) IR55 (Infrared 1550nm) IR65 (Infrared 1650nm)		24Z 24Z-TRG 24-ILSXXX 24-ILD U¹		POLO Must use CC with Polarizer		CC Select or leave blank for frosted cover		5M 10M Length can be customized: ex.7M=7meters Select or leave blank for 3 meters		M12D^{1 2} BC^{1 3} Select or leave blank for flying leads
Example 1: ISO2-10-IR05IR20IR30IR45IR55-24Z Example 2: ISO2-40-IR20IR30IR45IR55IR65-24Z						¹ Not available in lights exceeding 4A input current ² Default cable length for an M12D connector is 19 inches ³ Default cable length for a Barrel Connector is 10 feet								

Contact Metaphase Technologies or your local representative for options such as custom diffusers, lenses, polarizers, IP-rated enclosures for harsh environments, higher intensity, custom wavelengths, higher uniformity, etc. Not all options are available for all lights.

*(Link to Driver Options Key)

***(Link to Connector Key)

Specifications are subject to change

Copyright © Metaphase Technologies. All rights reserved

June 2019

www.metaphase-tech.com

ISO2

Sample Part Number: ISO2-10-IR05IR20IR30IR45IR55-24Z

LIGHT HOUSING IS ADJUSTABLE UP TO 95° IN EACH DIRECTION.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	6/21/2016	

SEE SHEET 2 FOR EXPLODED VIEW AND BOM

Metaphase Technologies, Inc. 211 Sinclair Road, Suite 100, Bristol, PA. 19007 215-639-8699 Fax 215-639-0977																	
QUANTITY: Per order	TOLERANCE/FINISH UNLESS OTHERWISE SPECIFIED	THIS DOCUMENT IS THE PROPERTY OF METAPHASE TECHNOLOGIES, INC. WHOM MAY LOAN IT. SUBJECT TO RETURN UPON DEMAND. IT INCLUDES CONFIDENTIAL & PROPRIETARY INFORMATION WHICH MAY NOT BE DISCLOSED TO ANY THIRD PARTY, AND/OR OBLIGED FOR ANY PURPOSE CONTRARY TO IT'S INTENDED USE, WITHOUT THE EXPRESSED PRIOR WRITTEN CONSENT OF METAPHASE TECHNOLOGIES, INC.															
MATERIAL: See BOM	INCHES (MM)																
FINISH: Matt Black Anodize	±.001 (±.025) ±.002 (±.051) ±.005 (±.127) ANGLES ±1°																
TREATMENT: N/A	Approval Signature	Date	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>TITLE</td> <td>ISO2 RGB-24-10 Light-10" LG</td> </tr> <tr> <td>USED ON</td> <td>Per customer</td> </tr> <tr> <td>SIZE</td> <td>B</td> </tr> <tr> <td>DRAWING NUMBER</td> <td>ISO2-RGB-24-10-1</td> </tr> <tr> <td>SCALE</td> <td>1:12</td> </tr> <tr> <td>REV</td> <td>A</td> </tr> <tr> <td>SHEET</td> <td>1 OF 1</td> </tr> </table>	TITLE	ISO2 RGB-24-10 Light-10" LG	USED ON	Per customer	SIZE	B	DRAWING NUMBER	ISO2-RGB-24-10-1	SCALE	1:12	REV	A	SHEET	1 OF 1
TITLE	ISO2 RGB-24-10 Light-10" LG																
USED ON	Per customer																
SIZE	B																
DRAWING NUMBER	ISO2-RGB-24-10-1																
SCALE	1:12																
REV	A																
SHEET	1 OF 1																

COMPLIANCE



CONTACT US

Contact Metaphase Technologies at **215-639-8699** or your local representative for additional details, options and customizations.

Contact us for further information

SODAVISION

machine vision. imaging technologies.

SODA VISION PTE LTD
39, Woodlands Close, #05-61, MEGA @ Woodlands,
Singapore 737856

(+65) 6694 0389
www.sodavision.com
sales@sodavision.com



SINGAPORE

HQ, OFFICE, #VISIONLAB

39 Woodland Close, #05-61
MEGA @ Woodlands,
737856
Singapore

[Opens in Google Map](#)

e: sales@sodavision.com
t: (+65) 6694 0389



MALAYSIA

OFFICE, #VISIONLAB

1-3-5, Summerskye Square,
Jalan Sungai Tiram 8, Bayan Lepas,
11900, Pulau Pinang,
Malaysia

[Opens in Google Map](#)

e: sales@sodavision.com
t: (+604) 609 7179



THAILAND

OFFICE

No. 1687/1 Phahonyothin Road,
Chatuchak Subdistrict,
Bangkok 10900,
Thailand

[Opens in Google Map](#)

e: sales@sodavision.com
t: (+66) 2126 8141



VIETNAM

OFFICE

B9, Toong Embassy,
4th Floor N01-T4 Building, Do
Nhuan Street, Bac Tu Liem District,
Hanoi 100000, Vietnam

[Opens in Google Map](#)

e: sales@sodavision.com
t: (+84) 961 899 392

